

# Point-to-Multi Point Base Station Surveillance PTMP Made Easy

## Incredible performance

Narrow Beam width 5MHz/ 10MHz



500+  
Mbps

WIS-L518AC is a 900Mbps 2\*2MIMO Hi-Power outdoor wireless Base Station based on 802.11a/n/ac technology. Featuring the revolutionary TDMA Intelligent Dynamic Polling Protocol technology, WIS-L518AC is fully compatible with WIS base station and bridge thus greatly improving the networks capability in throughput and latency. WIS-L518AC is best applied to rural wireless Internet Base Station and other industrial wireless surveillance solutions.

WIS new WIS-L518AC 500+ Mbps throughput - a result of powerful hardware platform with 802.11ac technology based radio. Incorporating a QCA 9563 CPU (750 MHz), a QCA 9882 radio and 64 MBytes of RAM and 16MBytes of flash memory the, WIS-L518AC series devices are an ideal solution for capacity demanding applications.

State of the art RF design with great output power and sensitivity parameters improve range and capacity over highest the modulation - 256 QAM. The 24V Gigabit Ethernet port (passive PoE) allows utilizing the full capacity of the radio when used in a Base Station or point-to-multipoint network design.

### Features

- Incredible Long Range
- Upto 29dBm Tx Power
- 18dBi MIMO 90deg. Sector antenna
- Wireless Speed 500+Bandwidth
- Narrow Beam width 5MHz/ 10MHz
- Noise Free, Zero Interference
- IP66 Waterproof
- Upto 5km



WIS-L518AC is a high-performance, high-speed outdoor long-distance wireless Base Station with characteristics such as long transmission distance, strong penetration ability, and strong anti-interference ability. just called as zero interference Product.




### Full Feature & Performance

- Full Wis OS Support
- Auto-Distance Adjust
- Upto 5km
- Fully Managed by WIS Centrally Software

### Wireless Solutions for Surveillance

- Cost-effective passive PoE
- IP66 Waterproof
- Multiple mounting methods
- Extremely Amazing Performance

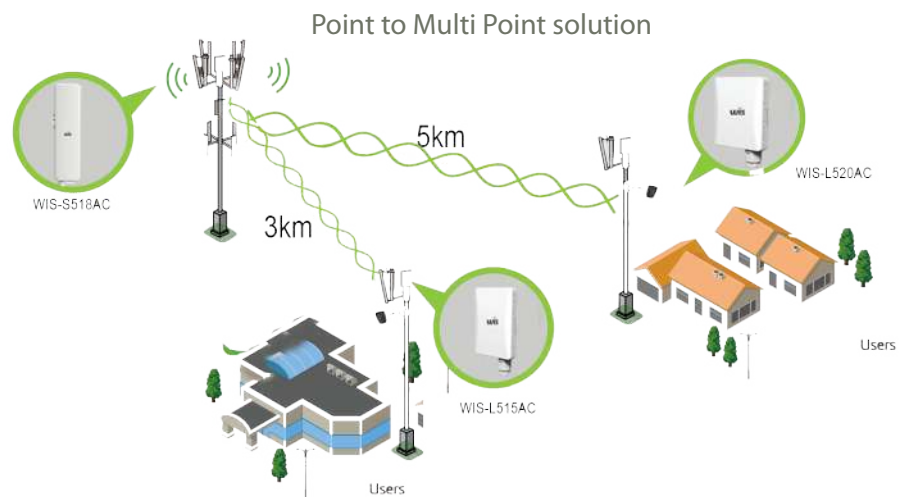

18 dBi Sector  
2X2 MIMO Antenna




15KV ESD & 6KV  
Lightning Protection



Narrow Beam  
5MHz/10MHz



Centralized  
Management

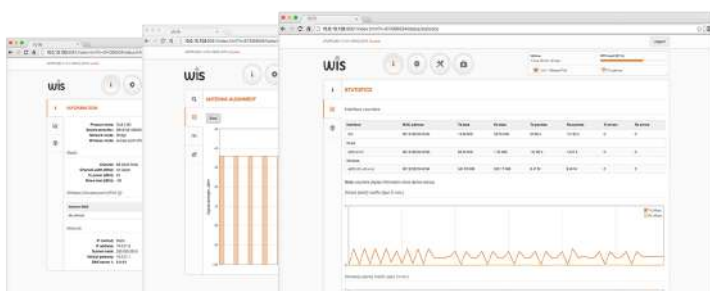

### Powerfull OS

The Wis OS is a highly functional and easy to use operating system embedded in all Wis hardware devices for effortless setup and trouble free operation. High performance (500 Mbps) allows offering more bandwidth together with additional services such as VoIP and IPTV. This is possible when using Wis's smart QoS mechanism and multicast traffic enhancements for triple play services. Such services are essential for all next generation service providers to complement their existing portfolios. WIS's proprietary transmission protocol, ensures smooth performance with a high number of clients even in noisy environments.



## Specifications

Distance Recommendation	PTMP Mode
WIS-L520AC	5km/ 3.1mi

### Wireless

WLAN Standard	IEEE 802.11a/n/ac
Radio Mode	MIMO 2x2
Radio Frequency Band	5.150GHz~5.850GHz (Debug mode: 4.9~6.1GHz) ( Country Dependent)
Transmit Power	Up to 29dBm (Country dependent)
Channel Size	5, 10, 20, 40, 80MHz
Data Rates	802.11ac @ 40 MHz: 400, 360, 300, 270, 240, 180, 120, 90, 60, 30Mbps 802.11ac @ 80 MHz: 866, 780, 650, 585, 520, 390, 260, 195, 130, 65Mbps

5G TX Power	802.11a	54M	24±2dBm	6M	27±2dBm
	802.11n HT20	MCS7	23±2dBm	MCS0	26±2dBm
	802.11n HT40	MCS7	22±2dBm	MCS0	25±2dBm
	802.11ac	MCS9	21±2dBm	MCS0	24±2dBm
5G Receiving Sensitivity	802.11a	54M	-72dBm	6M	-92dBm
	802.11n HT20	MCS7	-70dBm	MCS0	-89dBm
	802.11n HT40	MCS7	-68dBm	MCS0	-87dBm
	802.11ac	MCS9	-58dBm	MCS0	-85dBm

5G EVM	802.11a_54M: ≤-25 dB ; 802.11n_MCS7: ≤-28 dB ; 802.11AC_MCS9:≤-32dB
ppm	±20ppm
Reset	Press 10 seconds for factory resetting.

### Management

Working mode	Access Point (Automatic WDS), Access Point (TDMA3), Site (WDS/TDMA3), Site (ARNAT)
Wireless	Intelligent dynamic polling, automatic channel selection, automatic modulation mode selection, automatic transmission power control (ATPC)
Wireless Safety	WPA/WPA2 personal encryption, WPA/WPA2 enterprise encryption, WACL, user isolation
Wireless QoS	TDMA implements 4 queue priority
Network mode	IPv4 IPv6
VLAN	Support VLAN and VLAN transparent transmission
WAN	protocol Static IP, DHCP client
Service	DHCP service, SNMP service, NTP client, route tracking, ping watchdog
Management	HTTP(S) GUI, SSH, SNMP read, WNMS, Telnet
Built Tool	Site survey, connection testing, antenna calibration



## Antenna

Type Integrated Dual-Polarized Sector Antenna  
Gain 18dBi  
Wired  
Interface 10/100/1000 Base-T, RJ45

## Power

Power Supply 24 VDC passive PoE (AC to 24 VDC adapter is included in the package)  
Power Source 100 – 240VAC  
Max Power Consumption 10W

## Indicators

Dimension 430mm\*98mm\*80mm  
Weight 0.6kg

## IP Grade

IP66  
ESD 15 kV  
Lightning Protection 6 kV

## Physical

Dimensions 216mm (8.5 "), 184mm (7.2 "), 80mm (3.1 ")  
Weight 413g (0.91lb)  
Mounting Pole mounting bracket included

## Environmental

Operating temperature -40°C (-40°F) ~ +65°C (+149°F)  
Humidity 5 ~ 95 % (Non-Condensing)


## Warranty

2 years


## Regulatory

Certification CE/ROHS


## Antenna specification




Horizontal beam angle



Vertical beam angle



Horizontal beam angle



Vertical beam angle



Frequency Range	4.9 - 6.1GHz
Gain	18dBi
Polarization	Dual Linear
Polarization mode	Vertical/horizontal dual polarization
Azimuth Beamwidth (H pol)	90 deg
Azimuth Beamwidth (V pol)	90 deg

## ORDERING INFORMATION

WIS-L518AC

5GHz Outdoor Long distance Base Station



\*Product specifications and availability are subject to change without notice

